

## FLOOR DRAINS SMALL AREA MEDIUM DUTY

**FUNCTION:** Used in areas with moderate traffic and where waste water contains no sediment or debris and construction requires a shallow body drain for on grade applications.

Free Area  
 14.25 SQ IN  
 (92) SQ CM

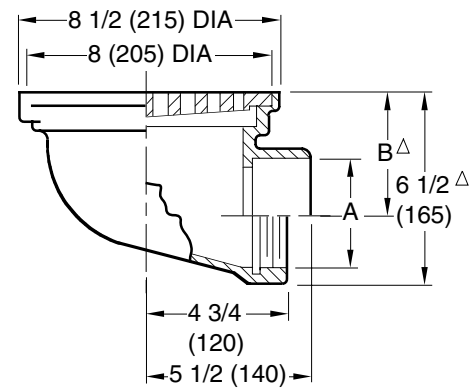
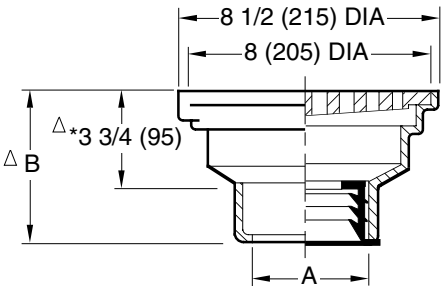


Fig. 2270C ... CAULK OUTLET  
 Fig. 2270Y ... NO-HUB OUTLET

Fig. 2275C ... CAULK OUTLET  
 Fig. 2275T ... THREADED OUTLET

A SIZE	02 (50)	03 (80)	04 (100)
B	5 (125) for Caulk, NO-HUB and Speedi-Set 3 1/2 (89) for Threaded		

A SIZE	02 (50)	03 (80)	04 (100)
B	4 3/4 (120)	4 1/4 (110)	3 3/4 (95)

\*This Dimension to Internal Stop of Speedi-Set Gasket.

△ add 1/4" (6) when bronze top is specified.

**REGULARLY FURNISHED:**

Duco Cast Iron Body and Loose Set Bar Grate.

**VARIATIONS:**

- Dome Grate -D
- Flat Bottom Strainer -FBS (Fig. 2270 only)
- Hinged Grate -H
- L Speedi-Set Service Weight (Fig. 2270 only)
- LXH Speedi-Set Extra Heavy (Fig. 2270 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2275 only)
- Sediment Bucket -B
- Square Top -S
- Tractor Grate (Specify Fig. 2271)
- Vandal Proof Grate -U
- T Threaded Outlet

**OPTIONAL MATERIALS:**

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2270  
 SIZE A  
 SCALE: NONE  
 DATE: 5-17-85  
 APPROVED BY: TD  
 CHECKED BY: TD  
 DRAWN BY: TWK  
 FIGURE NUMBER 2270, 2275  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
E	4-8-97	Added Millimeters	EMB	BS			2270, 2275
D	7-1-94	Revised	CMB	BS			
C	11-12-91	Submission Update	EMB	BS			
B	5-12-92	Rev. Reg. Furn.	TWK	BW			