SMITH® JAY R. SMITH MFG. CO.®
DIVISION OF SMITH INDUSTRIES, INC.
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com
CUSTOMER DRIVEN
MEMBER OF:

LOCATION

FLOOR DRAINS
WITH 12" (305) ROUND ADJUSTABLE TOPS

HEAVY DUTY DRAINS WITH TRACTOR GRATE

FUNCTION: Used in heavy duty traffic areas where large top drain is required. Adjustable top collar permits accurate positioning of grate to meet finished floor level.

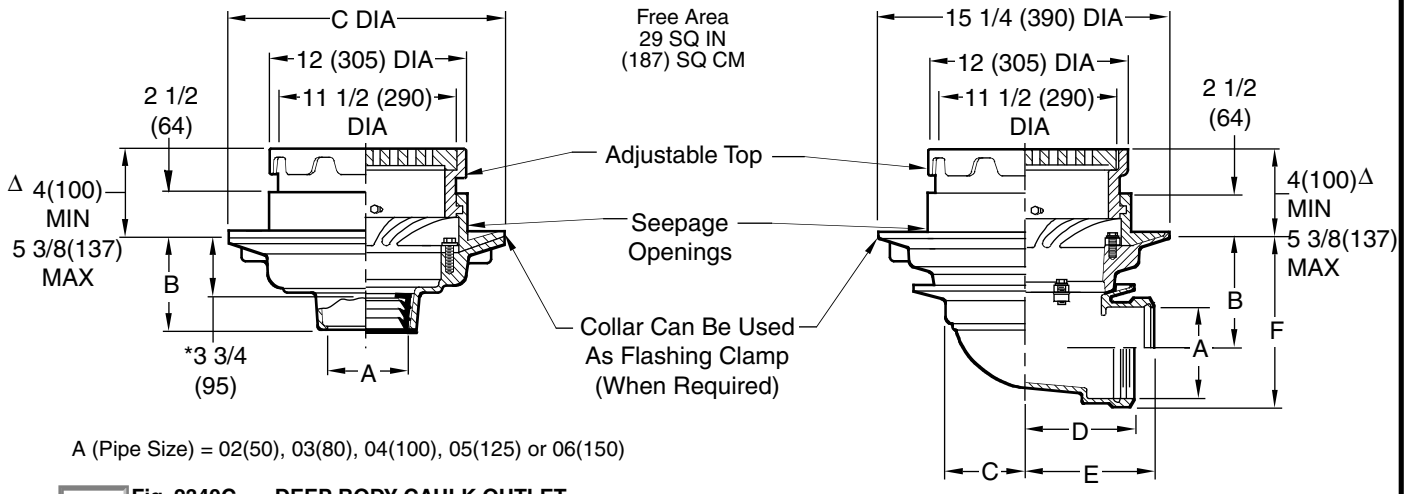

A (Pipe Size) = 02(50), 03(80), 04(100), 05(125) or 06(150)

- ☐ **Fig. 2340C . . . DEEP BODY CAULK OUTLET**
- ☐ **Fig. 2340Y . . . DEEP BODY NO-HUB OUTLET**
- ☐ **Fig. 2341C . . . SHALLOW BODY CAULK OUTLET**

- ☐ **Fig. 2345C . . . CAULK OUTLET**
- ☐ **Fig. 2345T . . . THREADED OUTLET**

Figure	B			C DIA
	Caulk	Thread	NO-HUB	
2340	5(125)	3 3/4(95)	5(125)	15 1/4(390)
2341	3 3/4(95)	3 3/4(95)	–	16(405)

A SIZE	02(50)	03(80)	04(100)	05(125)	06(150)
B	6 7/8(175)	6 3/8(162)	5 7/8(149)	5(125)	4 1/2(115)
C	4 3/4(120)	4 3/4(120)	4 3/4(120)	6 1/4(160)	6 1/4(160)
D	6(150)	6(150)	6(150)	6 5/8(168)	6 7/8(175)
E	7 1/4(185)	7 1/2(190)	7 3/4(195)	7 3/4(195)	7 3/4(195)
F	8 5/8(220)	8 3/4(220)	8 3/4(220)	8 1/2(215)	8 1/2(215)

*This Dimension to Internal Stop of Speedi-Set Gasket.

Δ add 1/8"(3) when bronze top is specified.

NOTE: 02(50),03(80), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.

REGULARLY FURNISHED:
Duco Cast Iron Body and Flashing Collar with Adjustable Top and Tractor Grate.

VARIATIONS:
- ☐ Adjustable Extensions 4 1/2(115) to 6"(150) -E
- ☐ Flat Bottom Strainer -FBS
- ☐ L Speedi-Set Service Weight 02(50), 03(80) & 04"(100) sizes only (Fig. 2340 only)
- ☐ LXH Speedi-Set Extra Heavy 02(50), 03(80) & 04"(100) sizes only (Fig. 2340 only)
- ☐ NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2341-2345 only)
- ☐ Sediment Bucket -B
- ☐ Square Top -S
- ☐ Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19) (Fig. 2340 only)
- ☐ Vandal Proof Grate -U
- ☐ T Threaded Outlet

OPTIONAL MATERIALS:
- ☐ Ductile Iron Grate -M
- ☐ Galvanized Cast Iron -G
- ☐ Nickel Bronze Top -NB
- ☐ Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY
E	4-9-97	Added Millimeters	EMB	BS
D	7-5-94	Revised	CMB	BS
C	10-1-93	Submittal Update	EMB	BS
B	10-15-92	Add Conversion Collar & Table	DHT	BS

WEIGHT POUNDS

VOLUME CUBIC FEET

FIGURE NUMBER
2340,2341,2345

E | DRAWING NUMBER S2340 | SIZE A | SCALE: NONE | DATE: 5-17-85 | APPROVED BY: TD | CHECKED BY: TD | DRAWN BY: PJ | 2340,2341,2345 | FIGURE NUMBER

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA