



FLOOR DRAINS

FLUSHING TYPE LABORATORY AND INSTITUTIONAL DRAINS


FUNCTION: Used in hospital operating rooms, cystoscopic and animal rooms where undesirable waste must be flushed to sewer. Particularly suitable for industrial and university laboratories. Used extensively in prisons, mental institutions and zoos as drain type water closets. Acid resistant coated interior and integral flushing rim maintain drain in sanitary condition.




HINGED PERFORATED GRATE
Perforated hinged grate allows liquids but prevents solids from passing and allows easy access for cleaning interior.



LOOSE SET WIDE BAR GRATE
Loose set wide bar grate permits solids disposal and allows removal for easy cleaning. Grate also available hinged (suffix-H).



INTEGRAL GRATE AND RIM
Vandal proof heavy wide bar grate permits solids disposal yet prevents removal of grate. Used where mentally disturbed or violent patients are confined.

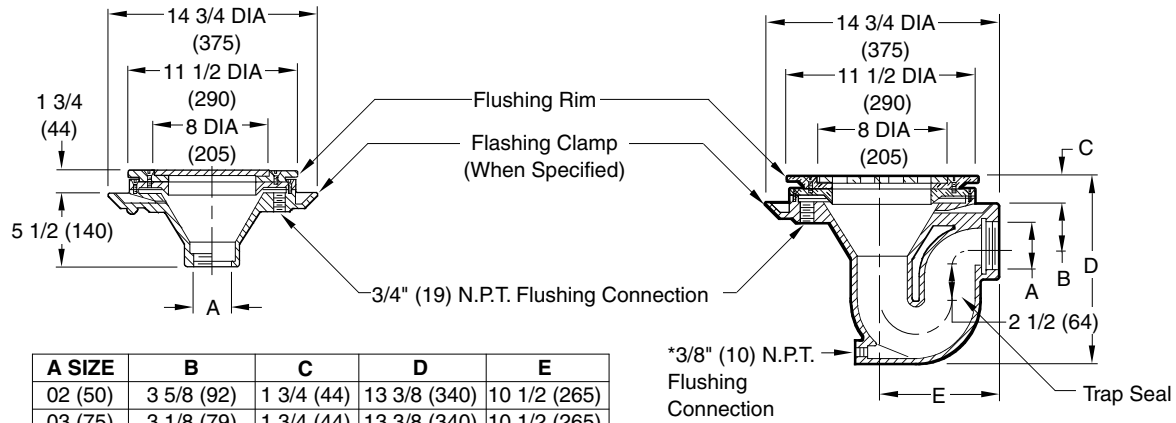

A SIZE	B	C	D	E
02 (50)	3 5/8 (92)	1 3/4 (44)	13 3/8 (340)	10 1/2 (265)
03 (75)	3 1/8 (79)	1 3/4 (44)	13 3/8 (340)	10 1/2 (265)
04 (100)	2 15/16 (75)	1 3/4 (44)	13 3/8 (340)	9 1/2 (240)

BOTTOM OUTLET

TRAP DRAIN

- | | |
|--|-------------------------------------|
| <input type="checkbox"/> Fig. 2500C HINGED PERFORATED GRATE | <input type="checkbox"/> Fig. 2505T |
| <input type="checkbox"/> Fig. 2501C LOOSE SET WIDE BAR GRATE | <input type="checkbox"/> Fig. 2506T |
| <input type="checkbox"/> Fig. 2502C INTEGRAL GRATE AND RIM | <input type="checkbox"/> Fig. 2507T |

REGULARLY FURNISHED:

Duco Cast Iron Body and Flange with Acid Resistant Coated Interior and Nickel Bronze Top with Vandal Proof Screws.

NOTE: Dimensions shown in parentheses are in millimeters.

VARIATIONS:

- Flashing Clamp -C
- Hinged Wide Bar Grate -H (Fig. 2501 & 2506 only)
- NO-HUB Adaptor (Specify Fig. 2646Y)
- Fabricated Stainless Steel Perforated Bucket -SSB
- T Threaded Outlet

OPTIONAL MATERIALS:

- Polished Bronze Top -PB

***NOTE:** The potable water supply to which a flushing type of drain is connected must be protected by a suitable vacuum breaker.

DRAWING NUMBER S2500
 SIZE A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
 FIGURE NUMBER 2500, 2501, 2502 2505, 2506, 2507
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

G	5-24-99	Rev Table & Variations	CMD	BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
F	4-21-95	Rev Table, Add Millimeters	EMB	JCS			2500, 2501, 2502
REV.	DATE	DESCRIPTION	BY	CKD. BY			2505, 2506, 2507