

G



**JAY R. SMITH MFG. CO.®**  
 DIVISION OF SMITH INDUSTRIES, INC.  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com




MEMBER OF:

LOCATION

## FLOOR DRAINS WITH HEAVY DUTY WIDE FLANGE FLASHING COLLAR

Free Area  
 14.25 SQ IN  
 (92) SQ CM

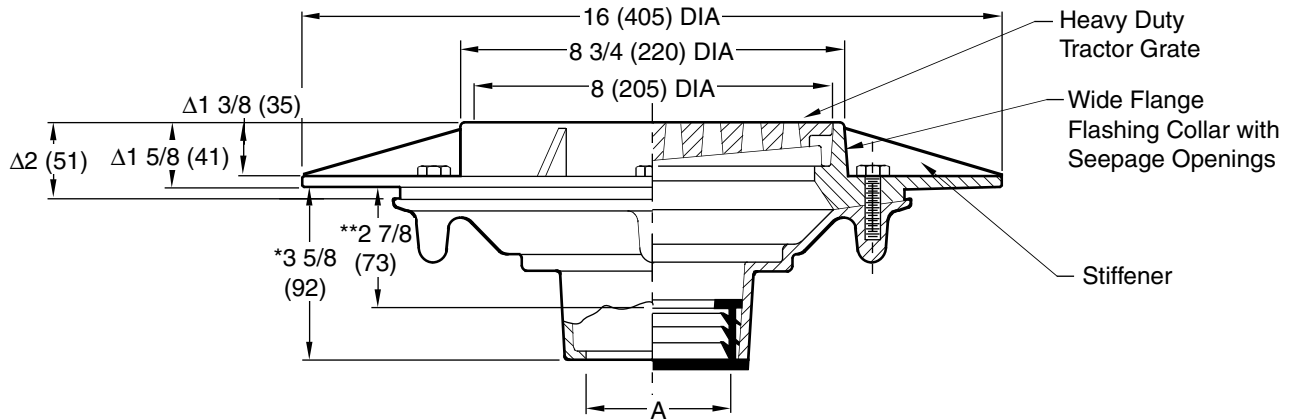

A (Pipe Size) = 02(50), 03(75), or 04(100)

Fig. 2614C . . . . CAULK OUTLET  
 Fig. 2614Y . . . . NO-HUB OUTLET

recommended deck opening 13" (330) DIA

**NOTE:** Dimensions shown in parentheses are in millimeters.

\*Same for Caulk and No-Hub, 2 (51) for Threaded.

\*\*This dimension to internal stop of Speedi-Set gasket.

Δadd 1/4 (6) when bronze top is specified.

### REGULARLY FURNISHED:

Ducto Cast Iron Body, Heavy Duty Wide Flange Flashing Collar With Heavy Duty Tractor Grate.

### VARIATIONS:

Dome Bottom Strainer -DBS  
 Cast Iron Flat Bottom Strainer -FBSCI  
 Side Outlet (Specify Fig. 2619)  
 Square Top -S  
 Vandal Proof -U  
 L Speedi-Set Service Weight  
 LXH Speedi-Set Extra Heavy  
 T Threaded Outlet  
 Underdeck Clamp -C

### OPTIONAL MATERIALS:

Ductile Iron Grate -M  
 Galvanized Cast Iron -G  
 Nickel Bronze Top -NB  
 Polished Bronze Top -PB

DRAWING NUMBER  
S2614SIZE  
ASCALE:  
NONEDATE:  
5-6-93APPROVED BY:  
BSCHECKED BY:  
CRDRAWN BY:  
TBW

2614

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

G  
F  
E9-9-09  
5-24-99  
1-20-97Revised Variations  
Changed Millimeters  
Changed Dim.RN  
CMD  
CMDAM  
BS  
BSWEIGHT  
POUNDSVOLUME  
CUBIC FEET

FIGURE NUMBER

2614

REV.

DATE

DESCRIPTION

BY

CKD. BY