




LOCATION

PLANTER DRAIN

CAST IRON ROUND TOP WITH ANTI-TILT GRATE

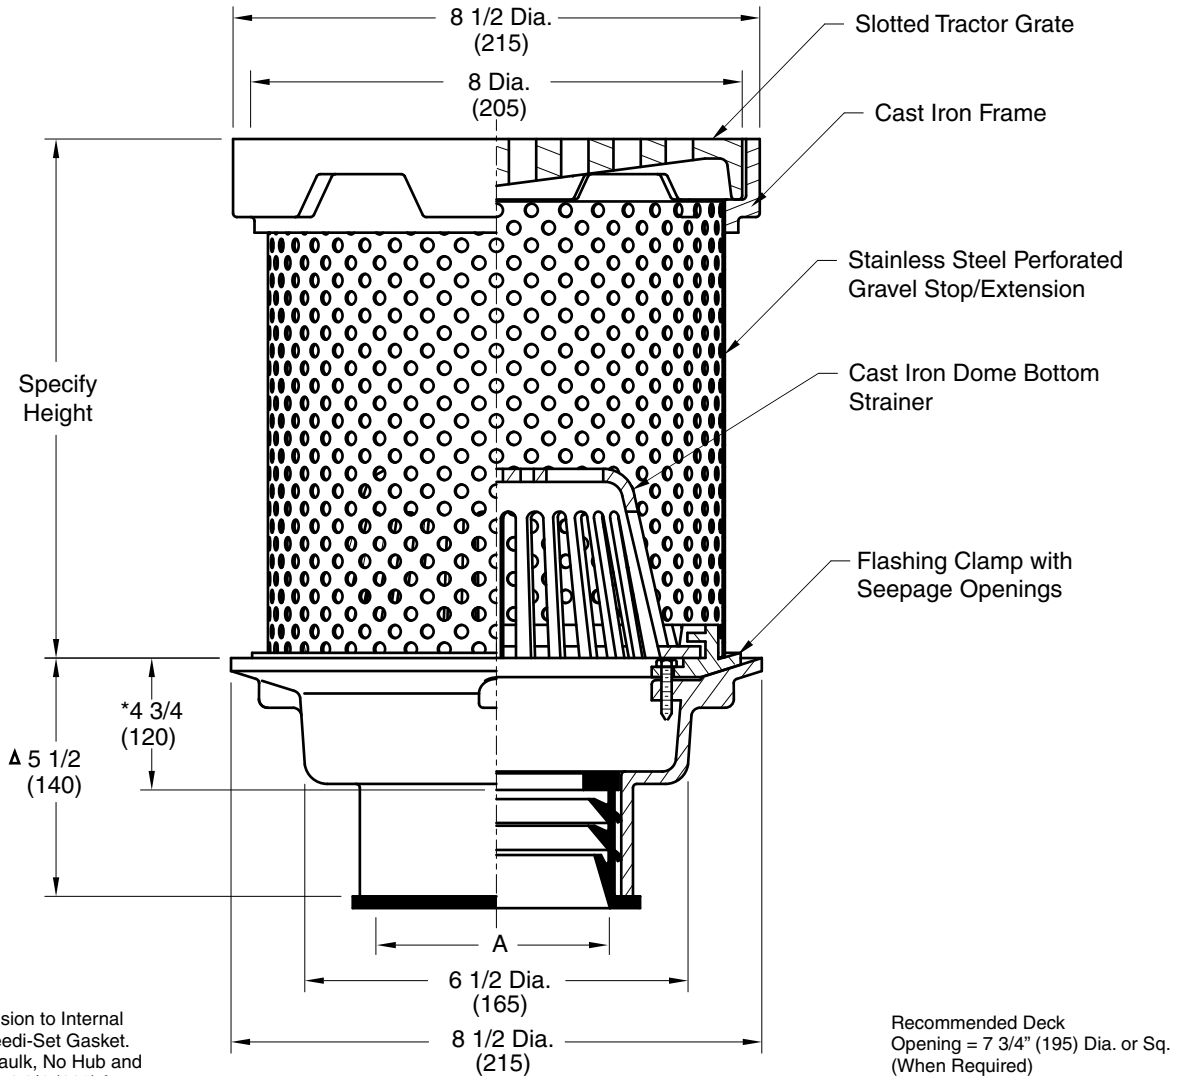

*This Dimension to Internal Stop of Speedi-Set Gasket.
 Δ Same for Caulk, No Hub and Speedi-Set, 4 1/4 (110) for Threaded.

Recommended Deck Opening = 7 3/4" (195) Dia. or Sq. (When Required)

A (PIPE SIZE) = 02 (50), 03 (75) or 04 (100)

- Fig.2679C CAULK OUTLET
- Fig.2679Y NO HUB OUTLET

REGULARLY FURNISHED:

Duco Coated Cast Iron Body, Flashing Clamp, and Dome Bottom Strainer with Stainless Steel Gravel Stop/Top Extender with Cast Iron Top Frame and Anti-Tilt Loose-Set Slotted Grate.

VARIATIONS:

- L Speedi-Set Service Weight Outlet Conn.
- LSW Speedi-Set Extra Heavy Outlet Conn.
- T Threaded Outlet Conn.
- Vandal Proof Grate -U
- Dome Grate -D
- Flat Bottom Strainer -FBS
- Trap Primer Connection -P

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

DRAWING NUMBER
s2679

SIZE
A

SCALE:
NONE

DATE:
7-20-09

APPROVED BY:
CR

CHECKED BY:
BW

DRAWN BY:
RN

2679

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

FIGURE NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS

VOLUME CUBIC FEET

FIGURE NUMBER
2679