



JAY R. SMITH MFG. CO.
 MEMBER OF ACORN'S FAMILY OF COMPANIES
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

EXPOSED 1/4 TURN WARM CLIMATE "TWIN TEMP" WALL HYDRANT

FUNCTION: For installation in walls where there is no danger of freezing. Ideal for use in food handling areas, dairies and other places where both hot and cold water are desired. 1/4 turn of the key allows full flow to be obtained.

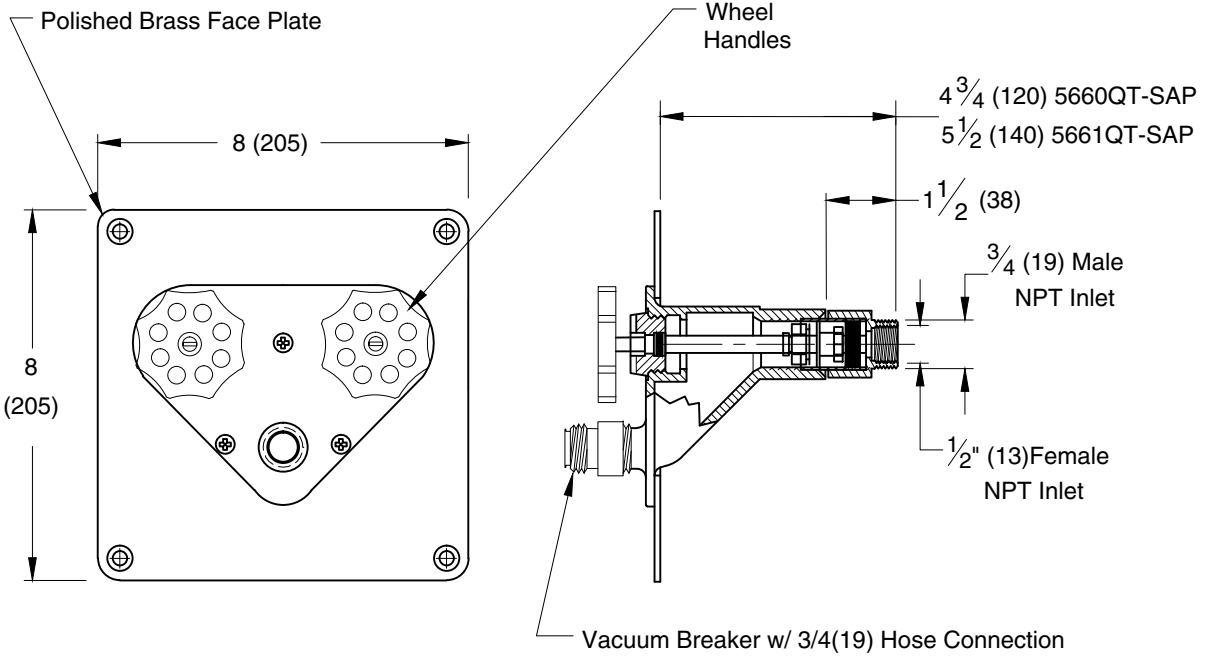


Fig. 5660QT (-SAP)1/2"(13) FEMALE & 3/4"(19) MALE INLET
 Fig. 5661QT (-SAP)1"(25) MALE INLET

REGULARLY FURNISHED:

Bronze Quarter Turn Warm Climate "Twin-Temp" Hydrant with 3/4"(19) Hose Connection, "T" Handle Key. Inlet Size Furnished as Indicated by Figure Number Selected.

VARIATIONS:

- Wheel Handle -WH
- 3/4"(19) Vacuum Breaker (Self Draining Type) -H

OPTIONAL MATERIALS:

- Nickel Bronze Face -NB
- Chrome Plated Face -CP
- Rough Bronze Face -RB

NOTES:

1. Recommended wall opening 6"(150) x 6"(150). Hydrant shall be in the vertical position only, the connection must be on the bottom.
2. All Jay R. Smith hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.
3. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water System Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
4. Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: 5660QT, 5661QT (SAP-H-WH)
 SIZE: A
 SCALE: NONE
 DATE: 6-21-11
 APPROVED BY: CL
 CHECKED BY: CL
 DRAWN BY: TBW
 FIGURE NUMBER: 5660QT (SAP-H-WH), 5661QT (SAP-H-WH)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							5660QT (SAP-H-WH) 5661QT (SAP-H-WH)