

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

MILD CLIMATE ANTI-SIPHON SILLCOCK

DUAL CHECK VALVE - BACKFLOW PROTECTED

FUNCTION: For installation in interior and exterior wall locations of buildings that are not subject to freezing. Dual Check valve prevents backflow due to low head pressure and conforms to the requirements of ASSE Standard 1052.

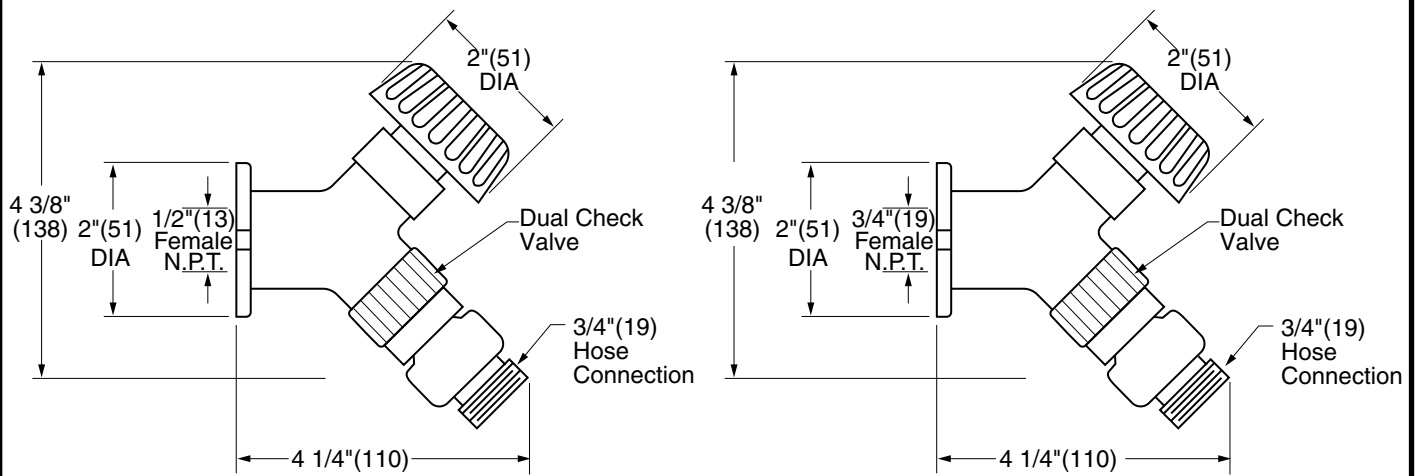


Fig. 5672 (-BFP).....1/2"(13) Inlet

Fig. 5673 (-BFP).....3/4"(19) Inlet

NOTES:

1. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
2. The Dual Check Valve may discharge water to prevent backflow. Do Not install where spillage may cause water damage.
3. Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Hose Valve has a Rough Finish Brass Body
 Removable Wheel Handle, "T" Handle Key,
 NPT Female Threaded Inlet Size Indicated
 by Figure Number Selected and ASSE 1052
 Dual Check Valve with 3/4"(19) Hose Connection.

NOTE: Dimensions shown in Parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							5672 (-BFP) 5673 (-BFP)