SMITH® JAY R. SMITH MFG. CO.®
DIVISION OF SMITH INDUSTRIES, INC.
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com
CUSTOMER DRIVEN
MEMBER OF:

LOCATION

SMITH SPEEDI-SEAL NEOPRENE GASKET

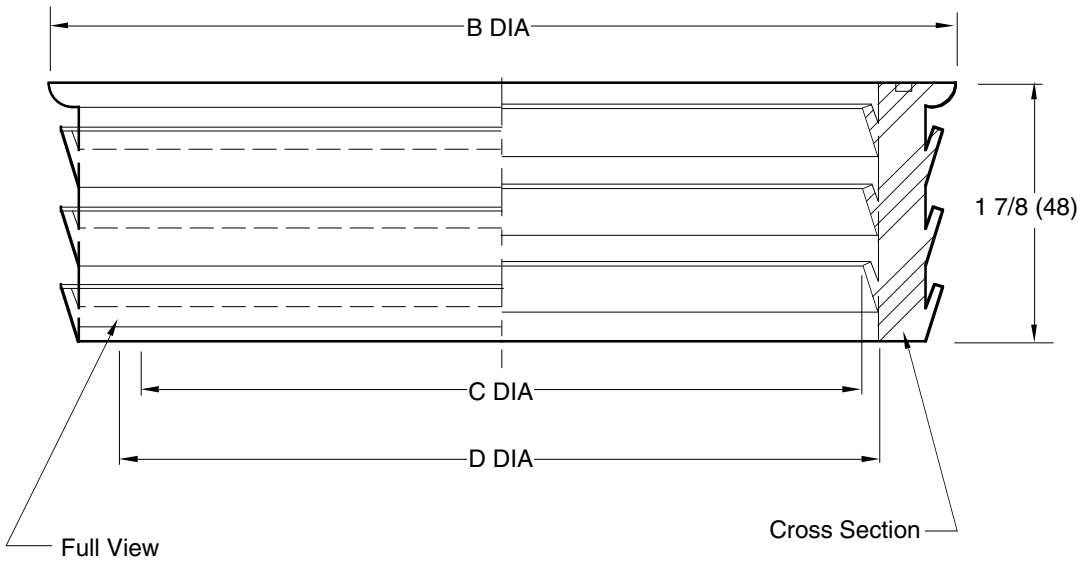

FIG. NO 9502			NOMINAL		
SIZE		PART	B	C	D
05 (125)	XH	36035-94-6	6 13/32(163)	5 5/16(135)	5 17/32(140)
05 (125)	SW	30645-94-6	6 13/32(163)	5 1/8(130)	5 11/32(136)
06 (150)	XH	36036-94-6	7 1/2(190)	6 11/32(161)	6 9/16(167)
06 (150)	SW	36046-94-6	7 1/2(190)	6 1/8(155)	6 3/8(162)

NOTE: Dimensions shown in parentheses are in millimeters.

NOTE: A threaded outlet with a plastic adaptor in lieu of the Speedi-Seal connection is recommended when plastic pipe is used in conjunction with roof drains.
NOTE: Use an adhesive lubricant with plastic pipe.

SW = SERVICE WEIGHT PIPE
XH = EXTRA HEAVY AND PLASTIC PIPE
MATERIALS: NEOPRENE PER ASTM - C564-85

WHERE USED: For use with Smith "Inside Caulk" Drains.

05(125) and 06"(150) Sizes

REV.	DATE	DESCRIPTION	BY	CKD. BY
C	4-22-97	Revised Dwg.	EMB	BS
B	12-5-95	Added Millimeters	EMB	BS
A	1-30-95	Submittal Update	EMB	BS

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		9502

C | DRAWING NUMBER S9502 5,6 | SIZE A | SCALE: NONE | DATE: 3-27-90 | APPROVED BY: TD | CHECKED BY: CR | DRAWN BY: CMB | 9502 | FIGURE NUMBER

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA