

L
DRAWING NUMBER S2240
SIZE A
SCALE: NONE
DATE: 6-19-85
APPROVED BY: TD
CHECKED BY: TD
DRAWN BY: CM
2240, 2245
FIGURE NUMBER

SMITH® JAY R. SMITH MFG. CO.®
DIVISION OF SMITH INDUSTRIES, INC.
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com




LOCATION

FLOOR DRAINS
WITH 12"(305) ROUND TOPS DEEP BODY - SEDIMENT BUCKET

MEDIUM DUTY DRAINS - "SAFE-SET" BUCKET

FUNCTION: For general use where water contains solids and debris that must be intercepted. Large deep body and bucket are adaptable to areas where heavy flow and considerable debris are anticipated. "Safe-Set" design insures bucket replacement after cleaning since top grate cannot be inserted unless bucket is in place.

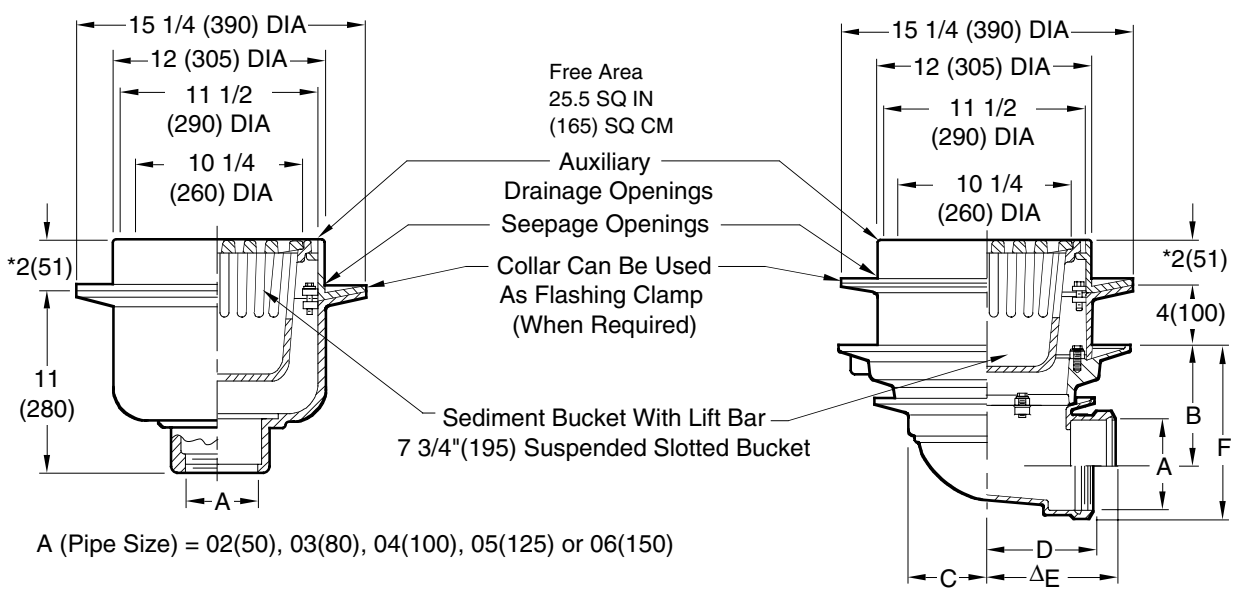

A (Pipe Size) = 02(50), 03(80), 04(100), 05(125) or 06(150)

- Fig. 2240C ... CAULK OUTLET
- Fig. 2240T ... THREADED OUTLET
- Fig. 2240Y ... NO-HUB OUTLET

- Fig. 2245C ... CAULK OUTLET
- Fig. 2245T ... THREADED OUTLET
- Fig. 2245Y ... NO-HUB OUTLET

| A SIZE | 02 (50) | 03 (80) | 04 (100) | 05 (125) | 06 (150) |
|--------|-------------|-------------|-------------|-------------|-------------|
| B | 6 7/8 (175) | 6 3/8 (162) | 5 7/8 (149) | 5 (125) | 4 1/2 (115) |
| C | 4 3/4 (120) | 4 3/4 (120) | 4 3/4 (120) | 6 1/4 (160) | 6 1/4 (160) |
| D | 6 (150) | 6 (150) | 6 (150) | 6 5/8 (168) | 6 7/8 (175) |
| ΔE | 7 1/4 (185) | 7 1/2 (190) | 7 3/4 (195) | 7 3/4 (195) | 7 3/4 (195) |
| F | 8 5/8 (219) | 8 3/4 (220) | 8 3/4 (220) | 8 1/2 (215) | 8 1/2 (215) |

REGULARLY FURNISHED:
Duco Cast Iron Body and Flashing Collar with Cast Iron Grate and Slotted Sediment Bucket.

- VARIATIONS:**
- Hinged Grate -H
 - Solid Free Standing Bucket -B (Specify Fig. 2241)
 - Square Top -S
 - Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)(Fig.2240 only)
 - Vandal Proof Grate -U
 - L Speedi-Set Service Weight 02(50), 03(75) & 04"(100) sizes only (Fig. 2240 only)
 - LXH Speedi-Set Extra Heavy 02(50), 03(75) & 04"(100) sizes only (Fig. 2240 only)

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: 02(50), 03(75), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.

Δ02(50), 03(75) & 04"(100) sizes only. The "E" dimension is 9(230) for NO-HUB outlets.
*Add 5/16" (8) when bronze top is specified

**Hinged grate not available in safe-set design. Full grate is provided with a suspended bucket.

NOTE: Dimensions shown in parentheses are in millimeters.

| | | | | | | | |
|-----------------------|--|--|---------------------------------|----------------------------|------------------|----------------------|------------------------------------|
| L K J H G | 8-28-06 8-21-06 1-29-97 1-24-97 3-5-96 | Rev. Dim., Table, Note Rev. Variations, Added NO-Hub Option Revised Note Revised Note Added Note | TBW TBW EMB CMD EMB | CL CL BS BS BS | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER 2240, 2245 |
| REV. | DATE | DESCRIPTION | BY | CKD. BY | | | |

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE